



[FAQ ID: 703]

How to setup TP-LINK router with Maxis Fibre modem?

Suitable for: Archer C7, TL-WDR3600, TL-WDR4300, TL-WR1043ND, TL-WR841HP

This article doesn't apply to TL-WR1043ND V1 and Archer C7 V1.

Note: Please prepare the Username and Password from Maxis for your internet service first. If you are not sure, please contact Maxis to get the information.

Step 1 Connect your computer to the LAN 2 or 3 port of the TP-LINK router. Connect the Maxis modem to the WAN port of the TP-LINK router.


Step 2 Open the web browser and in the address bar type in <http://tplinklogin.net>. And then press **Enter**.



Step 3 Type the username and password in the login page. The default username and password both are **admin**.



Step 4 Click **Quick Setup** and click **Next**. Then **Working Mode** choose **Maxis Mode** and click **Next**.

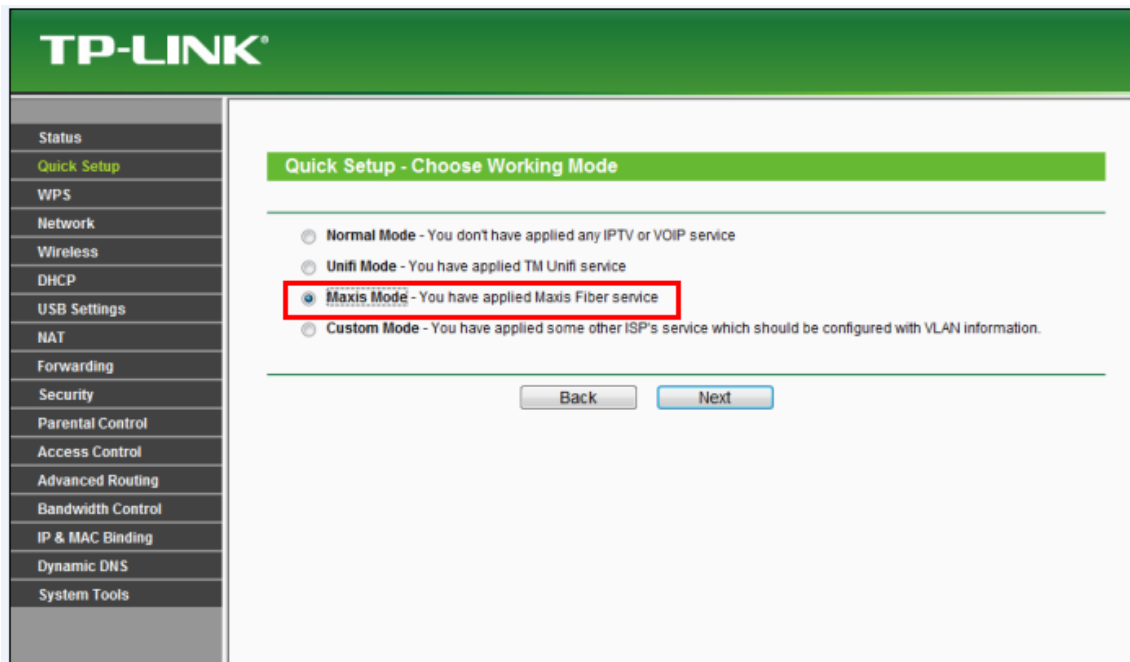

Step 5 This page is for setting up the VLAN of the IPTV and VOIP, don't change anything and click **Next**.

Note: Make sure IPTV VLAN ID is 823, if it's 822 please change it to 823.

Quick Setup - Maxis Fiber

LAN1: IPTV	VLAN ID: 823
LAN2: Internet	VLAN ID: 621
LAN3: Internet	VLAN ID: 621
LAN4: VOIP	VLAN ID: 821

Note: For Maxis Service, the VLAN ID of IPTV is 823, the VLAN ID of Internet is 621 and the VLAN ID of V

Back Next

Step 6 Put in the **Username** and **Password** from Maxis, click **Next**.


TP-LINK

Quick Setup - PPPoE


User Name:	provided by Maxis
Password:	provided by Maxis
Confirm Password:	provided by Maxis

Back Next

Step 7 You can create your own **Wireless Network Name** and **Password** on this page, **Region** please choose **Malaysia**, click **Next**. (For dual-band routers, you will be required to set up the wireless for 2.4GHz and 5GHz).

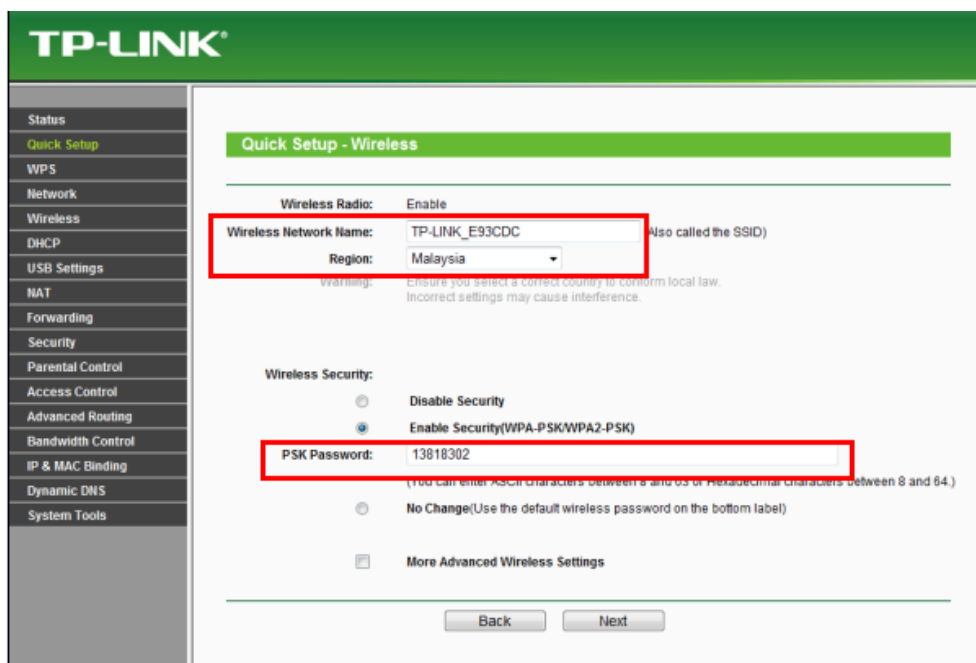

Step 8 Click **Reboot**. Wait for the router to reboot itself, at the meantime, please power cycle the Maxis modem.

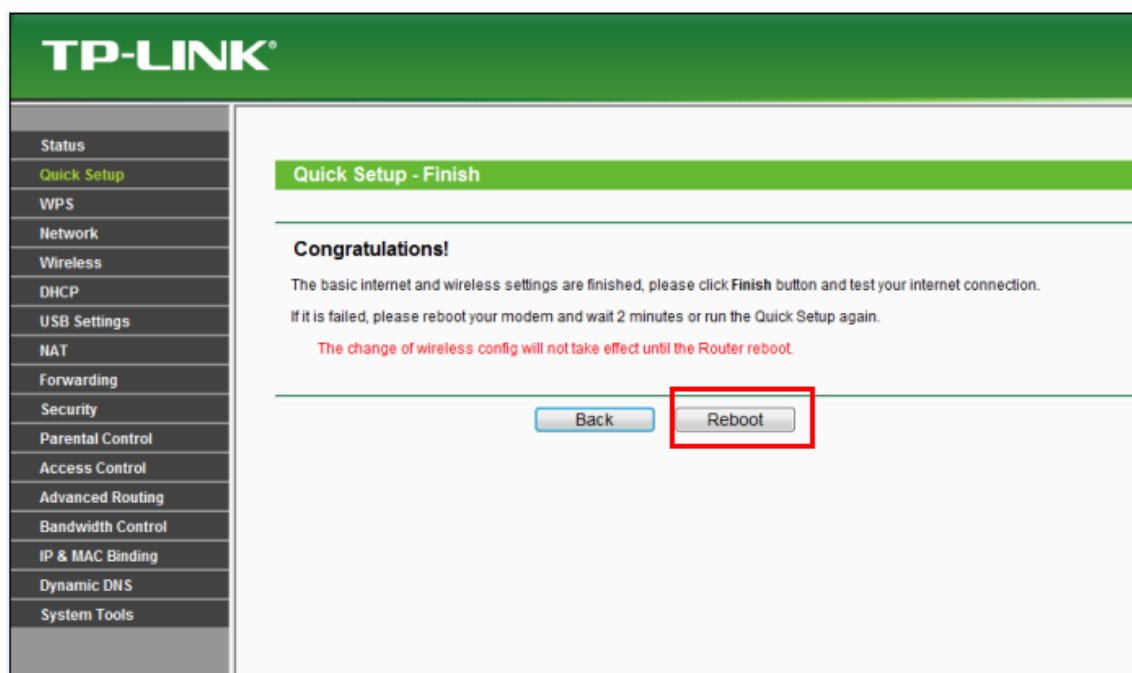

Step 9 After the modem and router are rebooted, please go to **Status** page, check **WAN** section, if the IP Address shows 0.0.0.0, please double check your Username and Password from Maxis and do the **Quick Setup** again. If it shows other numbers, that means the router is configured successfully.

The screenshot shows the 'Status' page of a TP-LINK router. The left sidebar contains a menu with 'Status' highlighted. The main content area is divided into sections: 'Wireless Radio', 'WAN', and 'Traffic Statistics'. The 'Wireless Radio' section shows settings for the wireless network, including Name (SSID), Mode, Channel, Channel Width, MAC Address, and WDS Status. The 'WAN' section shows settings for the WAN connection, including MAC Address, IP Address, Subnet Mask, Default Gateway, DNS Server, and Online Time. The 'Traffic Statistics' section shows a table of received and sent bytes and packets. The 'System Up Time' is also displayed at the bottom.

	Received	Sent
Bytes:	0	0
Packets:	0	0

Step 10 Connect your TV to LAN 1 and VOIP phone to LAN 4,try the services.

[Print](#) [E-mail](#) [Close](#) [Top](#) [Back to FAQ](#) Views: 399



[Download](#) | [Privacy & Terms of Use](#) | [Contact Us](#)

Copyright © 2014 TP-LINK Technologies Co., Ltd. All rights reserved.